



Maximum Performance



**MAXIMUM ENERGY EFFICIENCY.
SERIOUS RESULTS.**

UNIMAC.COM

UT & UTT SERIES 30-55 LB TUMBLE DRYERS

MAXIMUM PERFORMANCE WITH MORE CONTROL

Quality results are the goal of your on-premises laundry. However, you also want advanced functionality and access to the data that enables you to better manage your resources. UniMac® Premium tumble dryers deliver exceptional performance along with our legendary durability, while offering complete control of the operation.

LOWER YOUR COSTS WITH UNIMAC

Drying cycles are usually 30 percent longer than wash cycles. Reducing dry times to match wash times enables you to run your laundry at maximum efficiency. Our dryers are designed for fast drying, while balancing energy costs. With more than 70 years of dryer engineering experience, we have found the perfect balance between drying time and actual Btu usage to conserve energy,

OPTidry™


OVER-DRY PREVENTION TECHNOLOGY*

UniMac's optional OPTidry system takes efficiency further by eliminating costly over-drying. Removing over-drying from your laundry not only reduces utility expenses, but also curbs labor costs and extends linen life, saving up to thousands of dollars annually.


OPTIDRY SAVES AN AVERAGE OF 8 MINUTES PER LOAD.
WHAT WOULD 8 MINUTES PER LOAD SAVE YOU?



THE COST OF OVER-DRYING: UTILITIES**

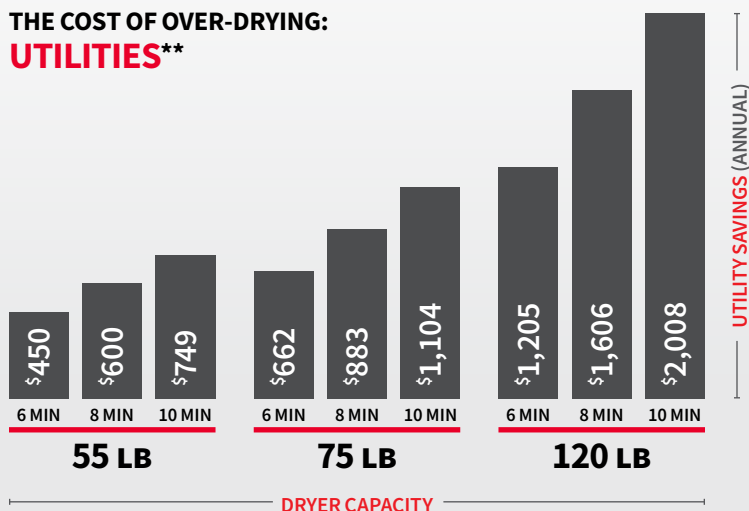

THE COST OF OVER-DRYING: LABOR***

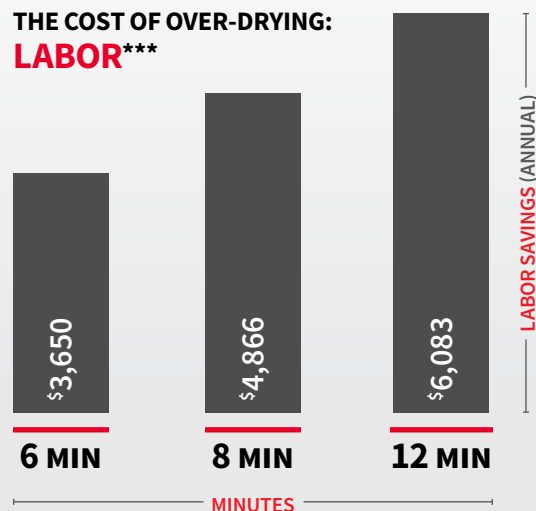

* OPTidry™ is available for tumble dryers with UniLinc Touch and select M Series control packages.

** Based on 10 loads/day, seven days/week and \$1.10/therm

*** Based on seven days/week and \$10/employee hour

UniLinc™ Touch

EASE OF USE drives the ultimate user experience in on-premises laundry with the UniLinc™ Touch control. UniMac's premium control brings simplicity, flexibility and intelligence to every laundry room.

Perfectly matched to UniMac's industrial performance and longevity, the UniLinc Touch control takes industry leading value and lowest total cost of ownership to the next level.



BRIGHT, CAPACITIVE TOUCH SCREEN
with clear cycle navigation



34 LANGUAGE OPTIONS
enabling staff members to operate the machine in their first language



STREAMLINE THROUGHPUT
with an easy-to-read main screen cycle countdown timer, complimented by a count-up timer upon completion of the cycle




SEAMLESS USER EXPERIENCE
with control continuity from the washer-extractor to the tumble dryer



STAFF TRAINING
is quick and simple with this intuitive control



SET-UP, PROGRAMMING, AND TROUBLESHOOTING
simplified with easy-to-understand notifications



DIAGNOSTICS AND MACHINE AUDIT DATA
identify and resolve errors faster, reducing downtime and service costs



M SERIES CONTROL

This customizable control allows any combination up to 30 auto-dry and time-dry cycles to be saved, providing easy user interface.



DUAL DIGITAL TIMER (DDT) CONTROL

This economy control allows for the operator to select the ideal temperature, heating time and cooling time for each use.



We engineered **CORE TECHNOLOGY** to help remove laundry room "blind spots" and give you access to important operations data through a user-friendly app. But why? Seemingly "small" operations missteps can have large impacts on the laundry's finished quality, efficiency, and much more.

Bottom line: you can't improve what you can't see. CORE is designed to remove those blind spots and helps you get the most out of your equipment investment.

ProCapture™ BY UNIMAC®

Through an industry-first patented process, ProCapture by UniMac captures up to 98 percent of tumble dryer lint.* This breakthrough technology produces a number of benefits including real dollars in savings.

*Results derived from internal lab testing environment produced up to 98% lint capture efficiency with bath towel loads dried at 185 degrees Fahrenheit. No independent lab testing was conducted. These results represent findings from controlled laboratory conditions and may not accurately simulate real-world usage of the product as effectiveness can vary widely depending on factors such as method of use, load type, environment, individual user characteristics, and other circumstances.

C.A.R.E.™

In the unlikely event of a linen fire within the cylinder, our optional Combustion Automated Response Equipped (C.A.R.E.) system, a multiport water manifold system, will saturate the linens in the cylinder. It can also activate an alarm at a remote location.

C.A.R.E.™ is available for tumbler dryers with UniLinc Touch and select M Series control packages.



Proudly based in Ripon, Wisconsin, USA, UniMac is dedicated to research, development and testing to provide equipment that delivers industrial strength and long-lasting quality.

SINGLE & STACK TUMBLE DRYERS

SPECIFICATIONS	UTS30	UT055	UTT30	UTT55
Control Options	UniLinc Touch, M Series, Dual Digital	UniLinc Touch, M Series, Dual Digital	UniLinc Touch, M Series, Dual Digital	UniLinc Touch, M Series, Dual Digital
Capacity - lb (kg)	30 (13)	55 (25)	30 (13) x 2	55 (25) x 2
Overall Width - in (mm)	31.5 (800)	34.5 (876)	31.5 (800)	34.4 (874)
Overall Depth - in (mm)	Standard 41.5 (1054) ProCapture 41.5 (1054)	53.1 (1349) 53.1 (1349)	43.6 (1107) 44.5 (1130)	54.4 (1382) 54.4 (1382)
Overall Height - in (mm)	63.9 (1623)	66.3 (1684)	76.3 (1938)	81.0 (2057)
Cylinder Diameter - in (mm)	30.0 (762)	33.0 (838)	30.0 (762)	33.0 (838)
Cylinder Depth - in (mm)	26.0 (660)	35.0 (889)	26.0 (660)	35.0 (889)
Cylinder Volume - cu. ft (liters)	10.6 (300)	17.3 (490)	10.6 (300)	17.3 (490)
Reversing Cylinder	Standard	Standard	Standard	Standard
Door Opening Size	22.7 (577)	26.9 (683)	22.7 (577)	26.9 (683)
Heat Input Power	Gas Standard - 73,000 Btu/hr ProCapture - 65,000 Btu/hr Electric 21 kW	Standard - 112,000 Btu/hr ProCapture - 110,000 Btu/hr 27 kW	Standard - 73,000 x 2 Btu/hr ProCapture - 68,000 x 2 Btu/hr 21 x 2 kW	Standard - 120,000 x 2 Btu/hr ProCapture - 108,000 x 2 Btu/hr -
Gas Connections* - NPT	1/2	1/2	1/2	3/4
Air Outlet - in (mm)	Standard 6 (152) ProCapture 8 (203)	8 (203) 8 (203)	1 x 8 (203) Oval 1 x 8 (203) Oval	1 x 10 (254) Oval 1 x 10 (254) Oval
Motor - HP	Fan Standard - 0.5 ProCapture - 0.5 Cylinder Standard - 0.5 ProCapture - 0.5	Standard - 0.5 ProCapture - 1.5 Standard - 0.5 ProCapture - 0.5	Standard - 2 x 0.5 ProCapture - 2 x 0.5 Standard - 2 x 0.5 ProCapture - 2 x 0.5	Standard - 2 x 1.5 ProCapture - 2 x 1.5 Standard - 2 x 0.5 ProCapture - 2 x 0.5
Airflow - cfm (liters/sec)	Standard 550 (260) ProCapture 550 (260)	700 (330) 650 (307)	2 x 400 (189) 2 x 400 (189)	2 x 700 (330) 2 x 650 (307)
Electrical Specs - amps	Gas & Steam B 100-120V/50-60/1 X** 200-240V/50-60/1-3 N 440-480V/50-60/3 Electric G 230-240V/50-60/3 L 460-480V/50-60/3	Standard - 11 ProCapture - 11 Standard - 6 ProCapture - 7 Standard - 3 52 27	Standard - 12 - Standard - 7 ProCapture - 11 Standard - 3 67 34	Standard - 16 ProCapture - 18 Standard - 9 ProCapture - 10 Standard - 6 52 x 2 27 x 2
Shipping Dimensions	Width 32.5 (826) Depth 47.0 (1194) Height 68.2 (1732)	35.5 (902) 57.0 (1448) 70.5 (1791)	32.5 (826) 47.0 (1194) 79.9 (2029)	35.5 (902) 57.3 (1455) 85.6 (2174)
Net Weight - lb (kg)	Gas Standard - 340 (154) ProCapture - 365 (166) Electric Standard - 345 (156) -	Standard - 440 (200) ProCapture - 495 (225) Standard - 425 (193) -	Standard - 580 (263) ProCapture - 620 (281) Standard - 605 (274) -	Standard - 735 (333) ProCapture - 815 (370) - -
Shipping Weight - lb (kg)	Gas Standard - 370 (168) ProCapture - 395 (179) Electric Standard - 375 (170) -	Standard - 480 (218) ProCapture - 535 (243) Standard - 465 (211) -	Standard - 615 (279) ProCapture - 655 (297) Standard - 640 (290) -	Standard - 780 (354) ProCapture - 860 (390) - -
Agency Approvals	UL	UL	UL	UL

* Field conversions available for LP gas.

**X voltage can be connected to 1 or 3 phase power and operates on 1 phase only.

ProCapture is not available with the Dual Digital control.

**TO LEARN MORE OR TO FIND A DISTRIBUTOR IN YOUR AREA,
VISIT UNIMAC.COM ALLIANCE LAUNDRY SYSTEMS - SHEPARD ST, RIPON, WI 54971 - 1.800.587.5458**

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems is registered to ISO 9001.